




## BIO-BASED HIGH-PERFORMANCE EEP SOLVENT

### Ethyl 3-Ethoxypropionate CAS#763-69-9

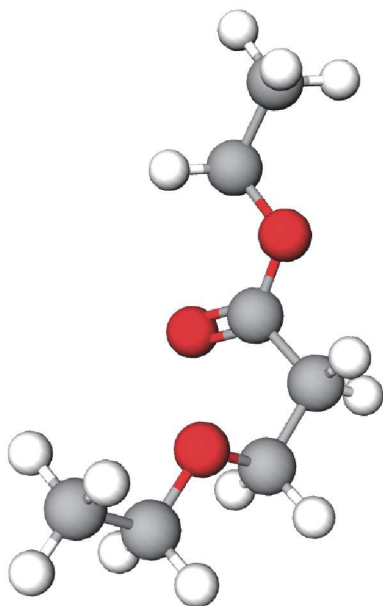

Low Evaporation Rate



Low Surface Tension



High Solvency



Excellent Solvent Release



Low Water Solubility



High Electrical Resistance



Non-HAP Solvent



REACH-certified

## Applications



Automotive Coatings



Optoelectronics Industry



Industrial Coatings

## Typical Properties

Empirical Formula	C <sub>7</sub> H <sub>14</sub> O <sub>3</sub>
Molecular Weight	146.19
CAS No.	763-69-9
Appearance	Colorless Transparent Liquid
Assay / Purity	≥ 99.0%
Color	≤ 15
Acidity	≤ 0.02%
Boiling Point	169 °C
Flash Point	59 °C
Moisture	≤ 0.05%
Liquid Density	0.948 - 0.953 g/cm <sup>3</sup>
Surface Tension	28.1 mN/m
Evaporation Rate	0.1 (n-butyl acetate = 1.0)
Hansen Solubility Parameters	
Hydrogen Bonding	4.3
Non-polar	1.6
Polar	7.9
Total	9.1
Liquid Viscosity	1.3 cP
Electrical Resistance	20 Megohms

## Packaging

Steel Drum: 198 KG/Drum

IBC: 930 KG/Container

ISO Tank: 20 MT/Tank

## Safety & Handling

Keep away from fire

Avoid direct sunlight, rain, and high temperature during transportation

Store in cool, shady, and ventilated conditions



 0086-755-83622997  sales@prechems.com  www.prechems.com

 15/F, Building D1, Nanshan iPark, Nanshan District, Shenzhen, China