




HIGH-PERFORMANCE MMP SOLVENT

Methyl 3-Methoxypropionate CAS#3852-09-3

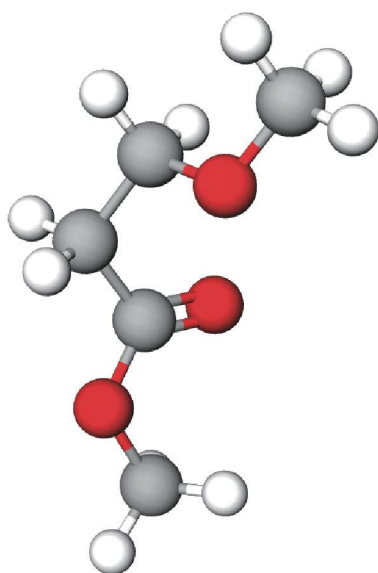

 Low Evaporation Rate

 Low Surface Tension

 High Solvency


 Excellent Solvent Release

 High Water Solubility

 High Electrical Resistance

 Non-HAP Solvent

Applications

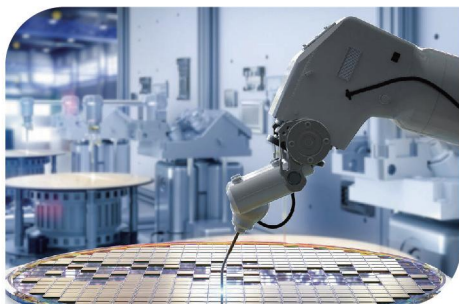

Optoelectronics Industry



Automotive Coatings



Industrial Coatings

Typical Properties

Empirical Formula	C ₅ H ₁₀ O ₃
Molecular Weight	118.13
CAS No.	3852-09-3
Appearance	Colorless Transparent Liquid
Assay / Purity	≥ 99.0%
Color	≤15
Acid Value	≤0.1 mgKOH/g
Boiling Range	140 - 148 °C
Flash Point	47 °C
Moisture	≤ 0.10%
Liquid Density	1.01 g/cm ³
Surface Tension	26.9 mN/m
Refractive Index	n ₂₀ /D 1.400
Evaporation Rate	0.4 (n-butyl acetate = 1.0)
Liquid Viscosity	1.3 cP

Packaging

Steel Drum: 200 KG/Drum

IBC: 950 KG/Container

ISO Tank: 22 MT/Tank

Safety & Handling

Keep away from fire

Avoid direct sunlight, rain, and high temperature during transportation

Store in cool, shady, and ventilated conditions



 0086-755-83622997  sales@prechems.com  www.prechems.com

 15/F, Building D1, Nanshan iPark, Nanshan District, Shenzhen, China